


### Junction / terminal box

mode of protection	II 2G Ex e II T6	II 2D Ex tD A21 IP66/67 T80°C
also as	II 1G Ex ia IIC T6	II 1D Ex iaD A20 T80°C
or	II 2G Ex e (ia) IIC T6	II 2D Ex tD A21 IP66/67 T80°C
empty enclosure	II 2G Ex e II	II 2D Ex tD A21 IP66/67

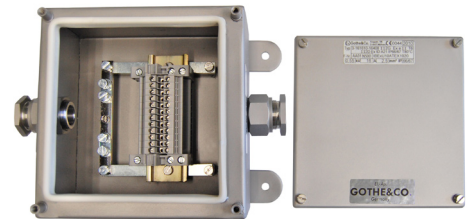


Bauart	3. ...
--------	--------

**EC-type examination certificate** IBExU10ATEX1020

**EC-type examination certificate empty closing** IBExU10ATEX1019U

max. voltage (acc. to clamping type)	550V / 690 V
intrinsic safety circuits	60 V
cross section	0,2 - 16 mm <sup>2</sup>
ingress protection	IP 66/67
ambient temperature range	-20°C up to +80°C

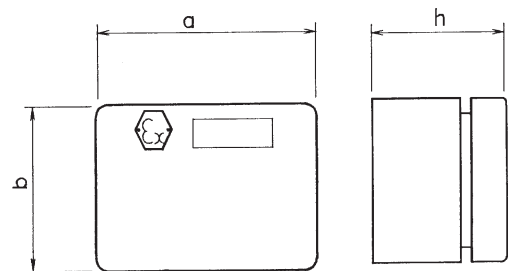

#### description

Junction / terminal box with screwable cover, stainless steel 316, optional empty enclosure or with installed terminals up to 16mm<sup>2</sup>, with hinges.

Casing can be equipped with PG or metric threads for cable glands in brass or stainless steel, e.g. 54200..., 54201... etc.

item number	h	a	b
3.16 16 10	100	160	160
3.20 20 10	100	200	200
3.27 27 10	100	270	270
3.27 27 15	150		
3.30 20 10	100	300	200
3.30 20 15	150		
3.30 30 10	100	300	300
3.30 30 15	150		
3.38 30 10	100	380	300
3.38 30 15	150		
3.38 30 21	210		
3.38 38 10	100	380	380
3.38 38 15	150		
3.38 38 21	210		
3.40 20 10	100	400	200
3.40 20 15	150		
3.40 20 21	210		
3.54 27 10	100	540	270
3.54 27 15	150		
3.54 27 21	210		
3.57 19 10	100	570	190
3.57 19 15	150		
3.57 19 21	210		
3.57 37 10	100	570	370
3.57 37 15	150		
3.57 37 21	210		