




### junction box


mode of protection  I M2 EEx e I  
 II 2G EEx e II T6  
 II 2D IP66/67 T80°C

type 53217-102

for connection of 2 cables


**EC-Type-Examination-Certificate** DMT 02 ATEX E 062

rated voltage	1000 V AC/DC
rated current	up to 65 A
cross section	0,5 - 16 mm <sup>2</sup>
coat of paint	RAL 1004 (yellow)
optional stainless steel	

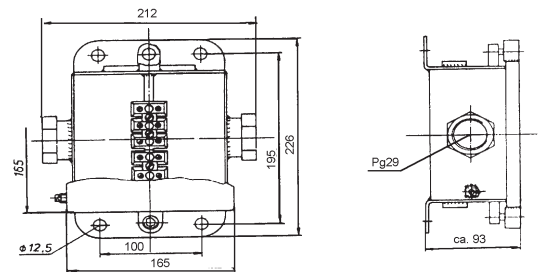

### description

casing and cover of steel sheet 3mm, with 2 separated bore holes, optional in metric and Pg-thread the casing is provided with 5 terminals, being screwed on a flat steel plate, 2 internal and 1 external earthings

item number		kgs (weight)
53217.102		4 kgs

### suitable cable glands

- ▶ 54340. ... (metric)
- ▶ 54350. ... (PG)