




junction and distribution box


mode of protection  I M2 EEx e I
 II 2G EEx e II T6
 II 2D IP66/67 T80°C

type 53218-104

for connection and distribution of up to 4 cables


EC-Type-Examination-Certificate DMT 02 ATEX E 062

rated voltage	1000 V AC/DC
rated current	up to 55 A
cross section	0,5 - 16 mm ²
coat of paint	RAL 1004 (yellow)
optional stainless steel	

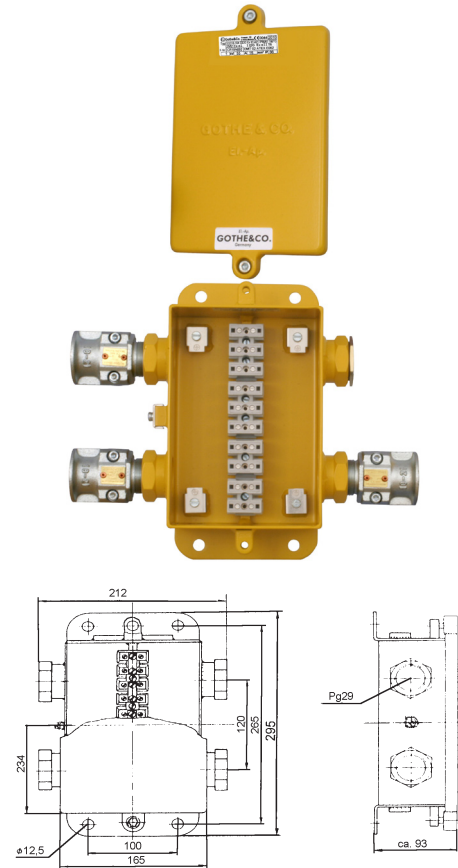

description

casing and cover of steel sheet 3mm, with 4 separated bore holes, optional in metric and Pg-thread the casing is provided with 10 terminals, being screwed on a flat steel plate, 4 internal and 1 external earthings

item number		kgs (weight)
53218.104		6 kgs

suitable cable glands

- ▶ 54340. ... (metric)
- ▶ 54350. ... (PG)